


Schutzrohr - einteilig
Thermowell - multi part
Doigts de gant - soudé

ASME/ANSI PTC 19.3

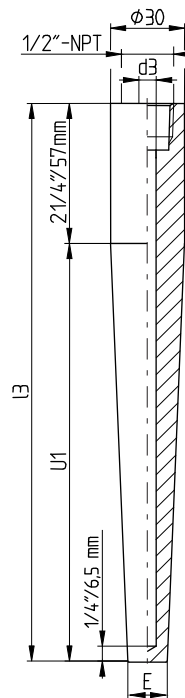

$$l1 = l3 - 1/4" / 6,5 \text{ mm}$$

Flansche für das Schutzrohr (siehe 12.0903-12.0904)

Flanges for Thermowell (see pages 12.0903-12.0904)

Bride pour Doigt de gant (voir 12.0903-12.0904)

Schutzrohr mit ½"-NPT-Innengewinde Thermowell with ½"-NPT-internal thread Doigts degant avec ½"-NPT-taraudage										
Messstofftemperatur Medium temperature Température du fluide		T _{max} T _{max} T _{maxi}		Max. zulässige Schutzrohrbelastungen siehe DIN 43772 max. stress load for thermowells see DIN 43772 Charge maximale pour doigts de gant voir DIN 43772						
Belastung Load Charge		P _{max} P _{max} P _{maxi}								
für Temperaturfühler: for stem: pour plongeur:		U1		l3		d3	E	Bestell-Nr. Order-N°.		
								N° de commande		
l1								Edelstahl 1.4571 316Ti Z6 CNDT 17-12	X2CrNi19-11 1.4306 304L Z 1 CN 18-12	X2CrNiMo17-12-2 1.4404 316L Z3 CND 17-11-02
inch	mm	inch	mm	inch	mm	mm	mm			
4	105	2	51	4¼	108	7	16	413 575	413 576	413 577
						9	19	413 578	413 579	413 580
6	155	4	102	6¼	139	7	16	413 581	413 582	413 583
						9	19	413 584	413 585	413 586
9	230	7	178	9¼	235	7	16	413 587	413 588	413 589
						9	19	413 590	413 591	413 592
11	280	9	229	11¼	286	7	16	413 709	413 710	413 711
						9	19	413 712	413 713	413 714
12	305	10	254	12¼	311	7	16	413 593	413 594	413 595
						9	19	413 596	413 597	413 598
15	380	13	330	15¼	387	7	16	413 599	413 600	413 601
						9	19	413 602	413 603	413 604
17	435	15	381	17¼	438	7	16	413 715	413 716	413 717
						9	19	413 718	413 719	413 720
18	460	16	406	18¼	463	7	16	413 605	413 606	413 607
						9	19	413 608	413 609	413 610
21	535	19	483	21¼	540	7	16	413 611	413 612	413 613
						9	19	413 514	413 615	413 616
24	610	22	559	24¼	616	7	16	413 617	413 618	413 619
						9	19	413 620	413 621	413 622